


New pitched roof, hybrid warm deck – horizontal ceiling

Foamseal

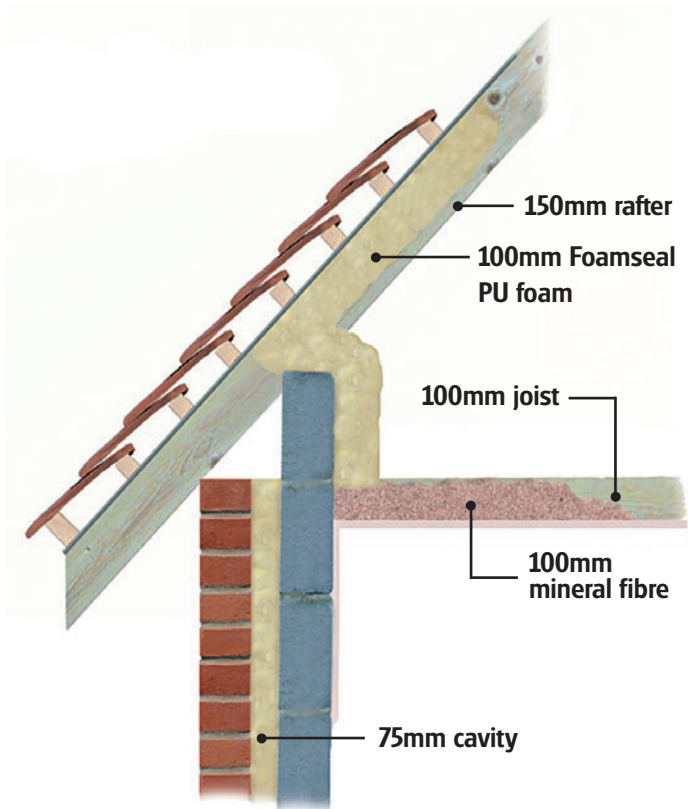

General

Specification:

Spray applied Foamseal polyurethane Foam between rafters onto breathable roofing membrane

Average depth:	100mm	140mm
U-value:	0.16W/m ² K	0.013W/m ² K
Condensation risk:	Zero	Zero
Ventilation:	Unventilated loft space	
Additional insulation:	100mm mineral fibre at ceiling level	

Foamseal is applied directly to the breathable roofing membrane between timber rafters and over the underside of rafters, in tiled or slated pitched roofs which enclose a non-habitable and unventilated loft space with additional thermal insulation between horizontal ceiling joists as required.

The resultant warm, dry and clean unventilated loft space provides excellent usage for storage. It is essential that the movement of moisture from the occupied space below by diffusion and convection is restricted by ensuring that the lining board has filled / sealed joints or a vapour control layer and that all penetrations into the loft space are sealed. Foil-faced plasterboards have better water vapour resistance than plain plasterboards and are usually recommended.

U-value and Condensation Risk Analyses

Construction details New pitched roof, hybrid warm deck	Thickness (mm)
Tiling including batten space	-
Breather membrane	-
Foamseal Spray Applied PU Foam	100.0
Loft space between flat ceiling and pitched roof line	-
Mineral fibre	100.0
Vapourcheck Wallboard	12.5
Thistle Finish Plaster (Multi Board)	2.0
U-value - 0.16W/m²K	

